

FROM THE FOUNDER OF THE VIKISEWS® BRAND



Back in 2016, when I started making my first sewing patterns and instruction manuals, my main goal was to solve the problems I personally faced at the beginning of my sewing journey: the lack of stylish patterns that provide a great fit and contain clear sewing instructions. That's how Vikisews was born—a brand designed to help you create fashionable, on-trend clothing with your own hands.



The sewing instructions we create is the result of our team's careful, meticulous work. May they help you develop your sewing hobby—or even turn it into your life's work! Enjoy every step of the sewing process and create a thoughtful, stylish wardrobe!

If you have any questions, we're always here to help: info@vikisews.com



SKYLER PATTERN DESCRIPTION

Skyler is a semi-fitted, fully lined jacket with a straight silhouette. The back has a center seam. The front and back feature applied yokes. There are patch pockets with flaps closing with set-in snaps on the front. The jacket features a turn-down shirt collar with a separate collar stand. The shoulder line is extended. The set-in sleeves are long and feature cuffs at the bottom. The jacket fastens with a separating zipper at the center front. There is a placket with hidden snaps on the right front. The yokes, collar, zipper, placket, and hem feature topstitching. Skyler is below-waist length.



PLEASE READ BEFORE USE

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Bust ease	Waistline ease	Upper arm ease
cm	19.6–25.7	36–42.1	6.2–12.1
inches	7 3/4–10 1/8	14 1/8–16 5/8	2 1/2–4 3/4

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Center back length, cm	Sleeve length including shoulder width and cuff, cm
1 (154–160)	51.4–54.2	72–75
2 (162–168)	54.4–57.2	74–76.9
3 (170–176)	57.4–60.2	76–78.9
4 (178–184)	60.4–63.1	78–80.9

Height, ft	Center back length, in	Sleeve length including shoulder width and cuff, in
1 (5'1"–5'3")	20 1/4–21 3/8	28 3/8–29 1/2
2 (5'4"–5'6")	21 3/8–22 1/2	29 1/8–30 1/4
3 (5'7"–5'9")	22 5/8–23 3/4	29 7/8–31 1/8
4 (5'10"–6'1")	23 3/4–24 7/8	30 3/4–31 7/8

SUGGESTED FABRICS

To sew this jacket, choose heavyweight or medium weight, non-stretch or low-stretch fabrics made of natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: corduroy, denim. As an additional fabric, we recommend using leather, suede, faux leather, and faux suede. For the lining, use lining fabrics made of artificial, blended, or synthetic fibers.

Attention! We do not recommend soft and lightweight (outerwear) fabrics.

The jacket in the photo is made of corduroy. The fabric is medium weight, low-stretch. The fiber content is 97% cotton + 3% elastane. The fabric weight is 310 g/m². The upper collar is made of 1 mm thick leather. The lining fabric is a blend of 54% polyester + 46% viscose. The fabric weight is 95 g/m².

FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size				
	34	36-38	40	42-44	46-52
1 (154-160)	1.4	1.4	1.45	1.5	1.6
2 (162-168)	1.4	1.45	1.5	1.55	1.65
3 (170-176)	1.45	1.45	1.55	1.6	1.7
4 (178-184)	1.5	1.5	1.6	1.65	1.75

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	Size				
	34	36-38	40	42-44	46-52
1 (5'1"-5'3")	1 1/2	1 1/2	1 5/8	1 5/8	1 3/4
2 (5'4"-5'6")	1 1/2	1 5/8	1 5/8	1 3/4	1 3/4
3 (5'7"-5'9")	1 5/8	1 5/8	1 3/4	1 3/4	1 7/8
4 (5'10"-6'1")	1 5/8	1 5/8	1 3/4	1 3/4	1 7/8

2. Additional fabric, 140 cm (55") wide, with a directional print/nap, for all sizes and heights — 0.2 m (1/4 yd).

3. Lining fabric, 140 cm wide, with a directional print, in meters:

Height, cm	Size	
	34-40	42-52
1 (154-160)	1.1	1.15
2 (162-168)	1.15	1.2
3 (170-176)	1.2	1.25
4 (178-184)	1.25	1.3

Lining fabric, 55" wide, with a directional print, in yards:

Height, ft	Size	
	34-40	42-52
1 (5'1"-5'3")	1 1/4	1 1/4
2 (5'4"-5'6")	1 1/4	1 1/4
3 (5'7"-5'9")	1 1/4	1 3/8
4 (5'10"-6'1")	1 3/8	1 3/8

4. Lightweight interfacing, knit or woven, 140 cm wide, in meters:

Height, cm	Size				
	34-36	38	40-42	44-48	50-52
1 (154-160)	0.55	0.6	0.6	0.65	0.65
2 (162-168)	0.6	0.6	0.6	0.65	0.65
3 (170-176)	0.6	0.6	0.65	0.65	0.7
4 (178-184)	0.65	0.65	0.65	0.7	0.7

Lightweight interfacing, knit or woven, 55" wide, in yards:

Height, ft	Size			
	34-36	38	40-42	44-52
1 (5'1"-5'3")	5/8	5/8	5/8	3/4
2 (5'4"-5'6")	5/8	5/8	5/8	3/4
3 (5'7"-5'9")	5/8	5/8	3/4	3/4
4 (5'10"-6'1")	3/4	3/4	3/4	3/4

IMPORTANT! When purchasing fabric, please account for shrinkage and buy 5% more than required.

5. Stitched bias-cut fusible stay tape with stitch reinforcement, 1.5 cm (5/8") wide — 0.55 m (5/8 yd).
6. Stitched straight-grain fusible stay tape, 1 cm (3/8") wide — 1.1-1.4 m (1 1/4 - 1 1/2 yd).
7. One metal zipper, 55-65 cm (21 5/8" - 25 1/2") long, depending on the chosen size.
8. Nine S-spring set-in snaps, 1.5 cm (5/8") in diameter.
9. Matching thread — 1 spool.
10. Matching topstitching thread (for example, Gutermann Top Stitch No. 30) — 2 spools.
11. Matching topstitching thread for the upper collar (for example, Gutermann Top Stitch No. 30) — 1 spool.

TOOLS AND EQUIPMENT

- sewing machine for construction
- one-sided foot for the sewing machine for attaching the zipper
- teflon or walking foot for the sewing machine
- stitch-in-the-ditch foot for the sewing machine (optional)
- hole puncher or awl
- press tool and molds for installing snaps

PATTERN PIECES LIST

1. From main fabric:

- front — cut 2
- front yoke — cut 2
- back — cut 2
- back yoke — cut 1 on fold
- sleeve — cut 2
- cuff — cut 2
- undercollar — cut 1 on fold
- collar stand — cut 1 on fold
- pocket — cut 2
- flap — cut 4
- placket — cut 2
- back neck facing — cut 1 on fold
- front facing — cut 2

Additionally, cut the following from the main fabric:

- 1.5 × 1.5 cm (1/2×1/2") squares — 5 pieces to reinforce snap fasteners

2. From additional fabric:

- upper collar — cut 1 on fold
- collar stand — cut 1 on fold

3. From lining fabric:

- front lining — cut 2
- back lining — cut 1 on fold
- sleeve lining — cut 2
- pocket lining — cut 2

***IMPORTANT!** Don't forget to transfer all pattern markings and notches onto the fabric.*

4. From interfacing:

- undercollar — cut 1 on fold
- upper collar — cut 1 on fold
- collar stand — cut 2 on fold
- placket — cut 2
- cuff — cut 2
- front facing — cut 2
- back neck facing — cut 1 on fold
- flap — cut 2

Additionally, cut the following from interfacing:

- two strips, 4 cm (1 5/8") wide (length according to the pattern) to interface the top edge of the pocket
- two strips, 5 cm (2") wide (length according to the pattern) to interface the hem allowance of the front piece
- one strip, 5 cm (2") wide and (length according to the pattern) to interface the hem allowance of the back piece.

The interfacing strips should be cut on the straight grain (parallel to the selvedge).

SEAM ALLOWANCES


All pattern pieces include seam allowances as follows:

- garment hem allowance — 5 cm (2")
- all other edges — 1 cm (3/8")

Take this into account when laying out the pattern pieces on the fabric.


CUTTING LAYOUT

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold,
for sizes 34–38 in all heights

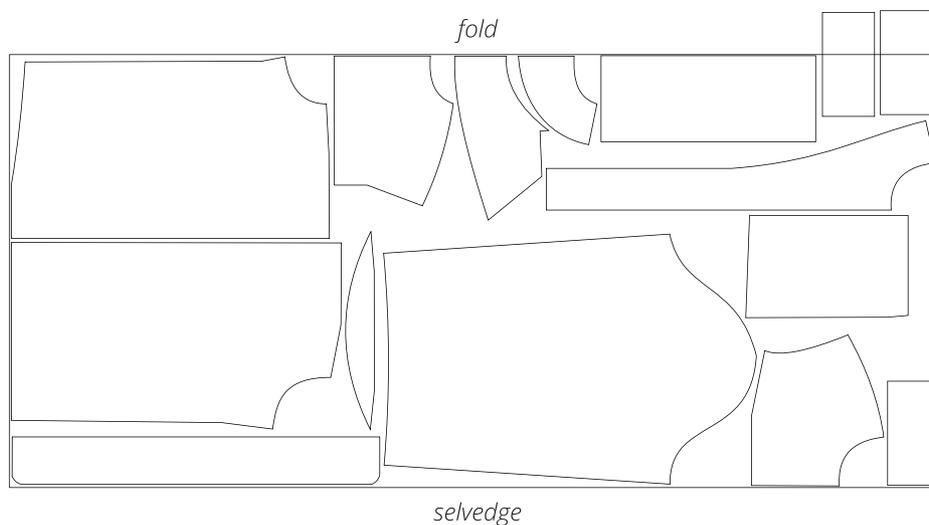


Attention! Cut only one collar stand piece. Cut the flap pieces on a single layer out of the leftover fabric.

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold,
for sizes 40–44 in all heights

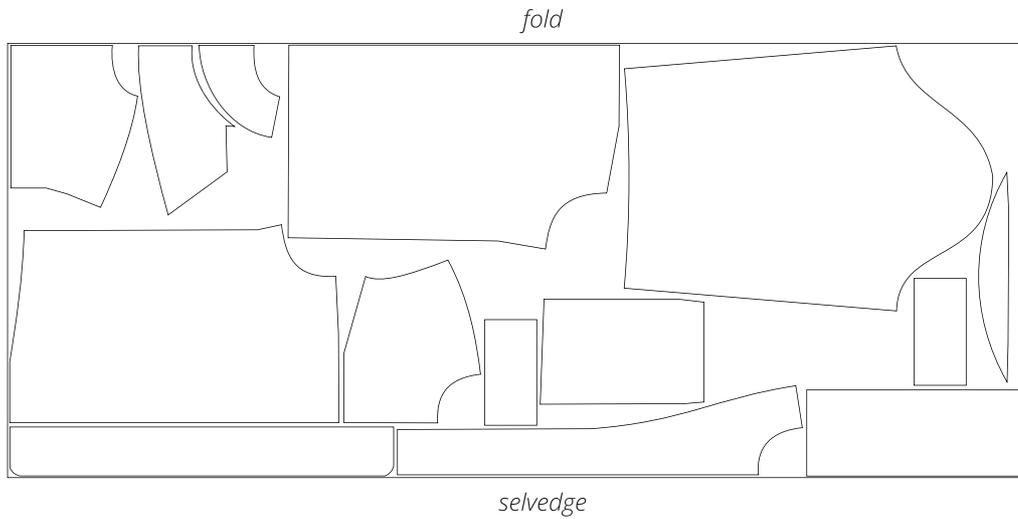


Attention! Cut only one collar stand piece.

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold,
for sizes 46–52 in all heights

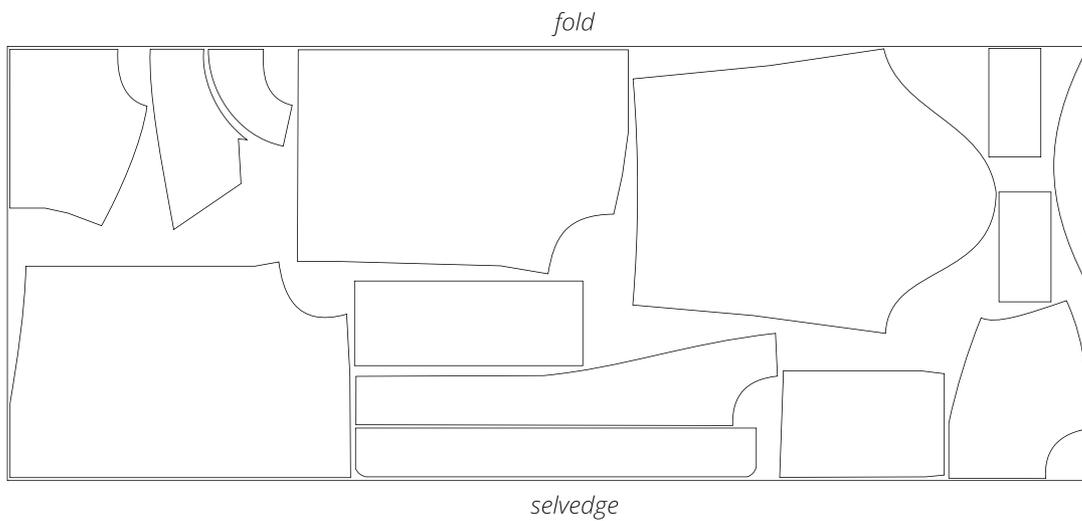


Attention! Cut only one collar stand piece.

Lining fabric, 140 cm (55") wide, with a directional print, cut on fold, for sizes 34-40 in all heights

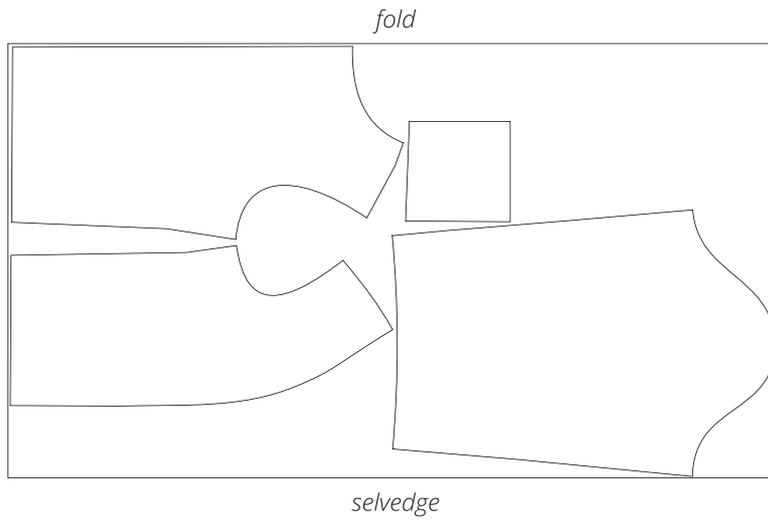


Lining fabric, 140 cm (55") wide, with a directional print, cut on fold, for sizes 42-52 in all heights

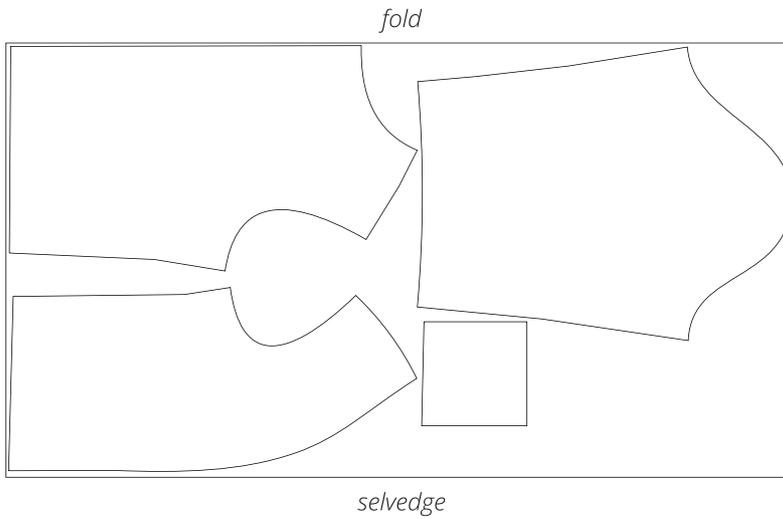


Additional fabric 140 cm wide, with a directional print/nap, cut on a partial fold, for all sizes in all heights




Interfacing, 140 cm (55") wide, cut on fold,
for sizes 34–36 in all heights

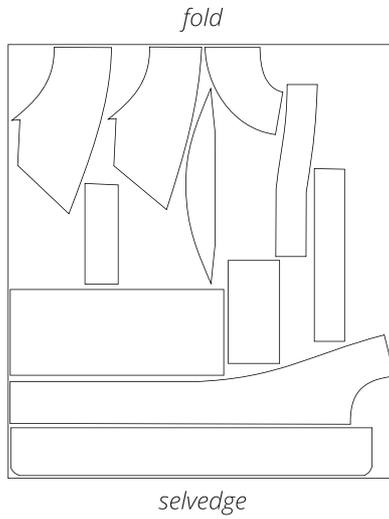

Interfacing, 140 cm (55") wide, cut on fold,
for sizes 38–52 in all heights

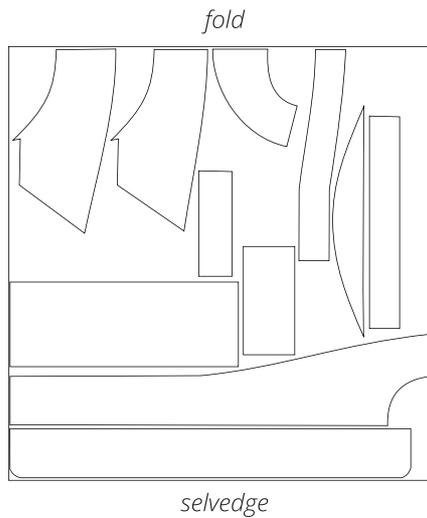

READY? LET'S GET SEWING!

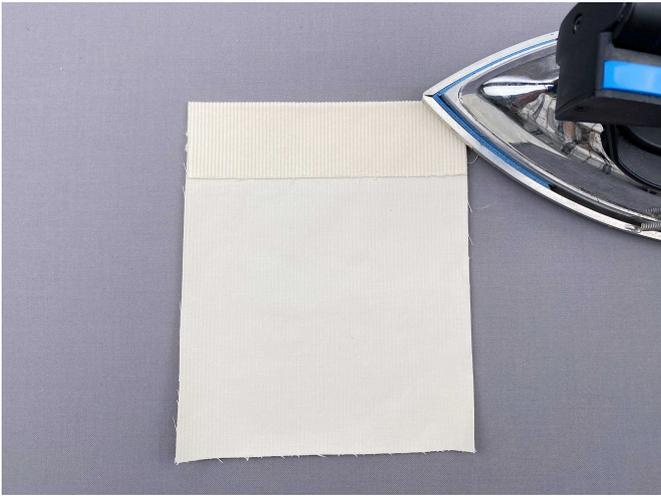

1. Using tailor's chalk, mark the foldline on the wrong side of the pocket piece. Fold the top pocket seam allowance to the wrong side and press along the foldline.



2. Place the pocket and pocket lining pieces right sides together, aligning the top edges. Pin and hand-baste. Machine-stitch, leaving an unstitched opening for turning the pocket. Backstitch at the beginning and end of the seam.



3. Press the seam flat. Press the seam allowances towards the lining.