

FROM THE FOUNDER OF THE VIKISEWS® BRAND




Back in 2016, when I started making my first sewing patterns and instruction manuals, my main goal was to solve the problems I personally faced at the beginning of my sewing journey: the lack of stylish patterns that provide a great fit and contain clear sewing instructions. That's how Vikisews was born—a brand designed to help you create fashionable, on-trend clothing with your own hands.



The sewing instructions we create is the result of our team's careful, meticulous work. May they help you develop your sewing hobby—or even turn it into your life's work! Enjoy every step of the sewing process and create a thoughtful, stylish wardrobe!

If you have any questions, we're always here to help: info@vikisews.com

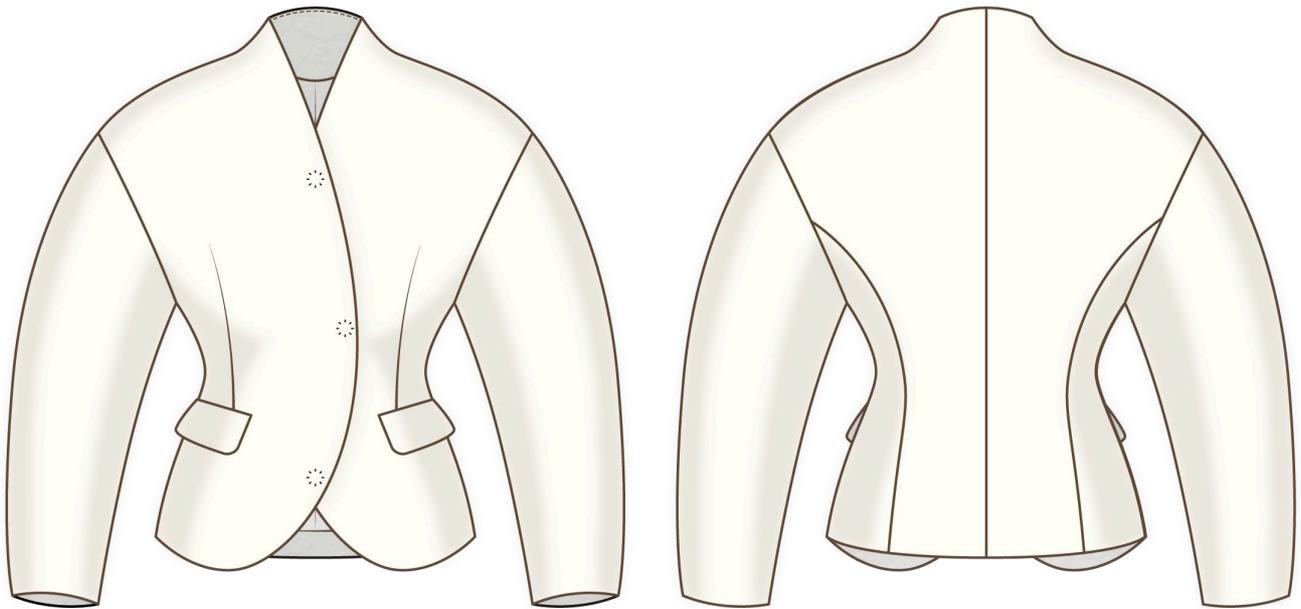

MYRTLE PATTERN DESCRIPTION

Myrtle is a semi-fitted, fully lined blazer with an accentuated waist. The back is fitted with a center seam and princess seams. The front is fitted with bust darts that transition into welt pockets with flaps. The center front edges are rounded. The shoulder line is extended. The long, set-in, two-piece sleeves are very loose-fitting at the shoulder and tapered towards the wrist. The blazer has a grown-on stand collar and closes with sew-on snaps. Myrtle is above-hip length.



PLEASE READ BEFORE USE

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Bust ease	Waistline ease	Hipline ease (estimated)	Upper arm ease
cm	9.6–5.7	10.1–15.6	16–30.2	21.2–13.1
inches	3 ³ / ₄ –2 ¹ / ₄	4–6 ¹ / ₈	6 ¹ / ₄ –11 ⁷ / ₈	8 ³ / ₈ –5 ¹ / ₈

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Back length including stand collar, cm	Sleeve length including shoulder width, cm
1 (154–160)	59.6–63.6	77.5–84.2
2 (162–168)	62.2–66	79.5–86.2
3 (170–176)	63.6–68.6	81.6–88.3
4 (178–184)	67.1–71.1	83.7–90.3

Height, ft	Back length including stand collar, in	Sleeve length including shoulder width, in
1 (5'1"–5'3")	23 ¹ / ₂ –25	30 ¹ / ₂ –33 ¹ / ₈
2 (5'4"–5'6")	24 ¹ / ₂ –26	31 ¹ / ₄ –33 ⁷ / ₈
3 (5'7"–5'9")	25–27	32 ¹ / ₈ –34 ³ / ₄
4 (5'10"–6'1")	26 ³ / ₈ –28	33–35 ¹ / ₂

SUGGESTED FABRICS

To sew this blazer, choose medium-weight, structured, non-stretch or low-stretch suiting and coating fabrics made of natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: wool suiting, boucle, jacquard, denim, and coating fabrics.

Attention! We do not recommend stretchy, soft, lightweight (dress-weight wool), or loosely woven suiting fabrics.

For the lining, choose lining fabrics made of artificial, blended, or synthetic fibers.

The blazer in the photo is made of wool coating fabric. The fabric is medium weight, structured, and low-stretch. The fiber content is 100% wool. The fabric weight is 470 g/m².

The lining is made of 100% viscose. The fabric weight is 130 g/m².

FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size								
	34	36	38	40	42	44	46	48-50	52
1 (154-160)	1.4	1.45	1.5	1.5	1.7	1.75	1.75	1.8	1.95
2 (162-168)	1.45	1.5	1.55	1.55	1.7	1.8	1.8	1.85	2
3 (170-176)	1.45	1.55	1.55	1.6	1.75	1.85	1.9	1.9	2.1
4 (178-184)	1.5	1.55	1.6	1.65	1.8	1.9	1.95	1.95	2.15

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	Size							
	34	36	38-40	42	44	46	48-50	52
1 (5'1"-5'3")	1 ½	1 ⅝	1 ⅝	1 ⅞	1 ⅞	1 ⅞	2	2 ⅛
2 (5'4"-5'6")	1 ⅝	1 ⅝	1 ¾	1 ⅞	2	2	2	2 ⅛
3 (5'7"-5'9")	1 ⅝	1 ¾	1 ¾	1 ⅞	2	2 ⅛	2 ⅛	2 ¼
4 (5'10"-6'1")	1 ⅝	1 ¾	1 ¾	2	2 ⅛	2 ⅛	2 ⅛	2 ¾

2. Lining fabric, 140 cm wide, with a directional print, in meters:

Height, cm	Size						
	34-36	38-40	42	44	46	48-50	52
1 (154-160)	1.1	1.15	1.25	1.25	1.3	1.3	1.3
2 (162-168)	1.15	1.2	1.3	1.3	1.3	1.35	1.35
3 (170-176)	1.2	1.25	1.35	1.35	1.35	1.4	1.4
4 (178-184)	1.25	1.3	1.35	1.4	1.4	1.45	1.5

Lining fabric, 55" wide, with a directional print, in yards:

Height, ft	Size			
	34-36	38-40	42-46	48-52
1 (5'1"-5'3")	1 ¼	1 ¼	1 ⅜	1 ⅜
2 (5'4"-5'6")	1 ¼	1 ¼	1 ⅜	1 ½
3 (5'7"-5'9")	1 ¼	1 ⅜	1 ½	1 ½
4 (5'10"-6'1")	1 ⅜	1 ⅜	1 ½	1 ⅝

3. Lightweight interfacing, knit or woven, 140 cm wide, in meters:

Height, cm	Size								
	34	36	38	40	42	44	46	48-50	52
1 (154-160)	1.4	1.45	1.5	1.5	1.7	1.75	1.75	1.8	1.95
2 (162-168)	1.45	1.5	1.55	1.55	1.7	1.8	1.8	1.85	2
3 (170-176)	1.45	1.55	1.55	1.6	1.75	1.85	1.9	1.9	2.1
4 (178-184)	1.5	1.55	1.6	1.65	1.8	1.9	1.95	1.95	2.15

Lightweight interfacing, knit or woven, 55" wide, in yards:

Height, ft	Size							
	34	36	38-40	42	44	46	48-50	52
1 (5'1"-5'3")	1 ½	1 ⅝	1 ⅝	1 ⅞	1 ⅞	1 ⅞	2	2 ⅛
2 (5'4"-5'6")	1 ⅝	1 ⅝	1 ¾	1 ⅞	2	2	2	2 ⅛
3 (5'7"-5'9")	1 ⅝	1 ¾	1 ¾	1 ⅞	2	2 ⅛	2 ⅛	2 ¼
4 (5'10"-6'1")	1 ⅝	1 ¾	1 ¾	2	2 ⅛	2 ⅛	2 ⅛	2 ⅜

IMPORTANT! *When purchasing fabric, please account for shrinkage and buy 5% more than required.*

3. Stitched bias-cut fusible stay tape with stitch reinforcement, 1.5 cm (5/8") wide — 2.75 m (3 yd)
4. Three plastic snaps, 1.5-2 cm (5/8-3/4") in diameter
5. Matching thread — 2 spools

TOOLS AND EQUIPMENT

- sewing machine for construction
- one-sided foot for the sewing machine

PATTERN PIECES LIST

1. From main fabric:

- front – cut 2
- center back – cut 2
- side back – cut 2
- front sleeve – cut 2
- back sleeve – cut 2
- top flap – cut 2
- welt – cut 2
- pocket facing – cut 2
- front facing – cut 2
- back neck facing – cut 1

2. From lining fabric:

- front lining – cut 2
- center back lining – cut 2
- front sleeve lining – cut 2
- back sleeve lining – cut 2
- bottom flap – cut 2
- pocket top lining – cut 2
- pocket bottom lining – cut 2

3. From interfacing:

- front– cut 2
- center back – cut 2
- side back – cut 2
- front sleeve – cut 2
- back sleeve – cut 2
- top flap – cut 2
- welt – cut 2
- pocket facing – cut 2
- front facing – cut 2
- back neck facing – cut 1
- bottom flap – cut 2

Additionally, cut the following from interfacing:

- two strips, 3 cm (1 1/8") wide (length according to the pattern), to interface the pocket area on the front piece.

The interfacing strips should be cut on the straight grain (parallel to the selvedge).

IMPORTANT! *Don't forget to transfer all pattern markings and notches onto the fabric.*

SEAM ALLOWANCES


All pattern pieces include seam allowances as follows:

- garment hem allowance — 4 cm (1 5/8")
- sleeve hem allowance — 4 cm (1 5/8")
- pocket lining curved edges — 1.5 cm (5/8")
- all other edges — 1 cm (3/8")

Take this into account when laying out the pattern pieces on the fabric.


CUTTING LAYOUT

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold, for sizes 34–40 in all heights

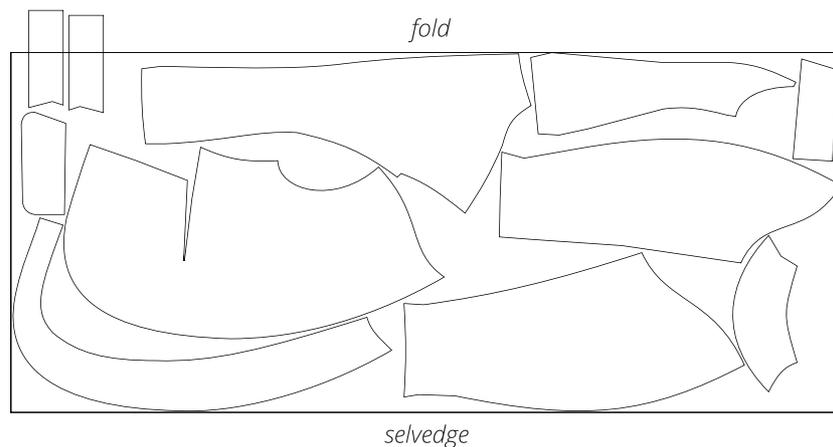


Attention ! Cut the welt pieces on a single layer out of the leftover fabric.
Cut only one back neck facing piece.

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold, for sizes 42–50 in all heights

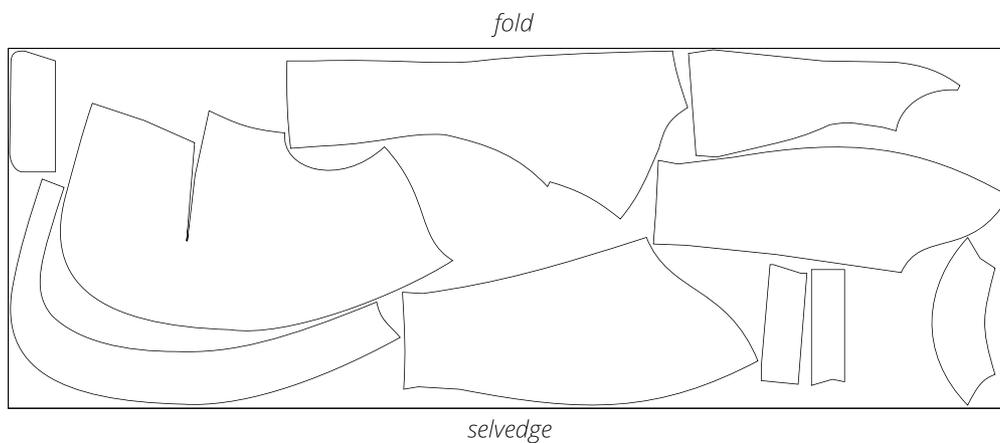


Attention! Cut only one back neck facing piece.

Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on fold, for size 52 in all heights

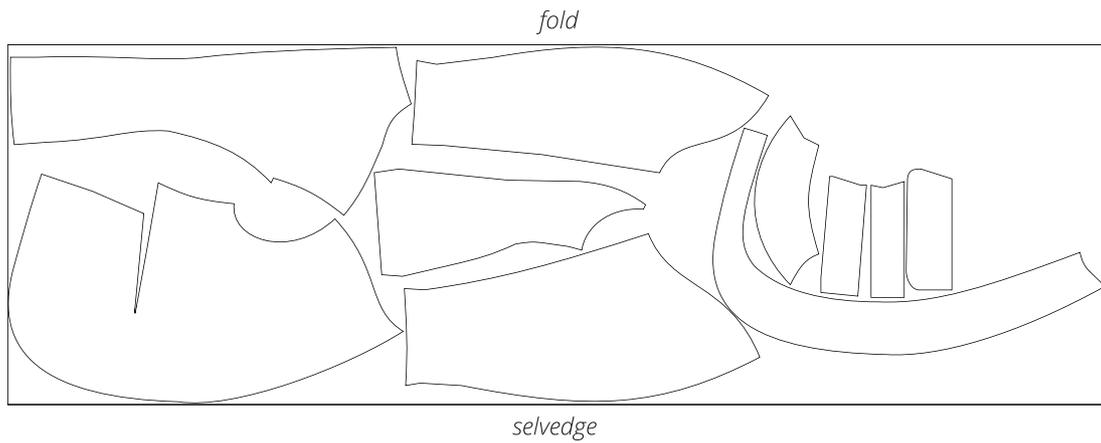


Attention! Cut only one back neck facing piece.


Lining fabric, 140 cm (55") wide, with a directional print,
cut on fold, for sizes 34-40 in all heights

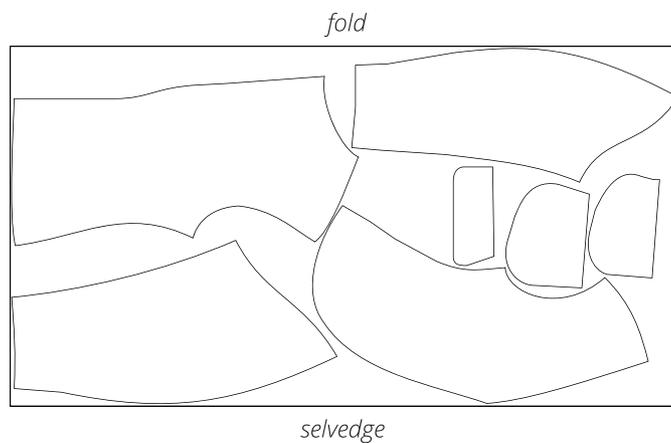

Lining fabric, 140 cm (55") wide, with a directional print,
cut on fold, for sizes 42–52 in all heights

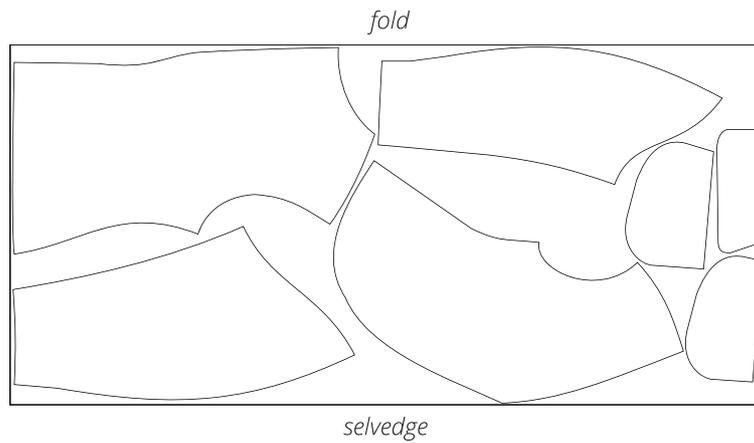


Interfacing, 140 cm (55") wide, cut on fold,
for sizes 34–40 in all heights

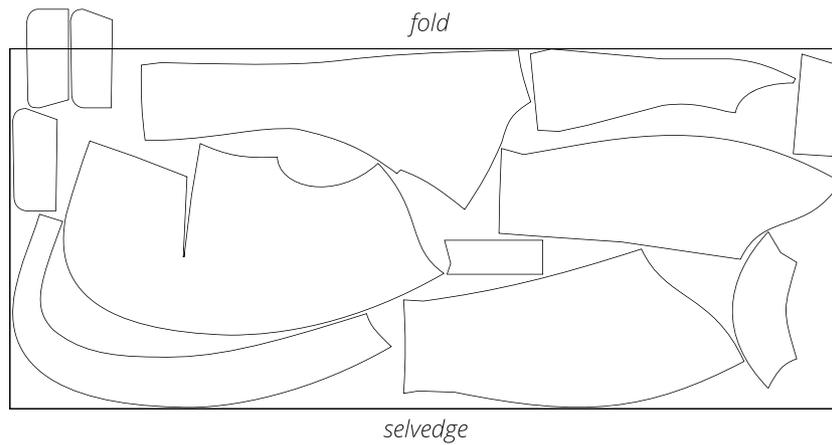


Attention! Cut the bottom flap pieces on a single layer out of the leftover fabric.
Cut only one back neck facing piece.

Interfacing, 140 cm (55") wide, cut on fold,
for sizes 42-50 in all heights

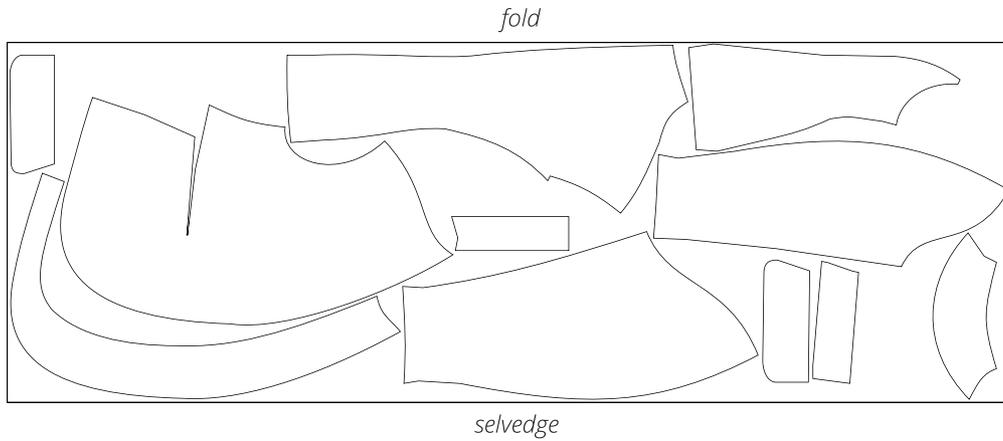



Attention! Cut only one back neck facing piece.

Interfacing, 140 cm (55") wide, cut on fold,
for size 52 in all heights

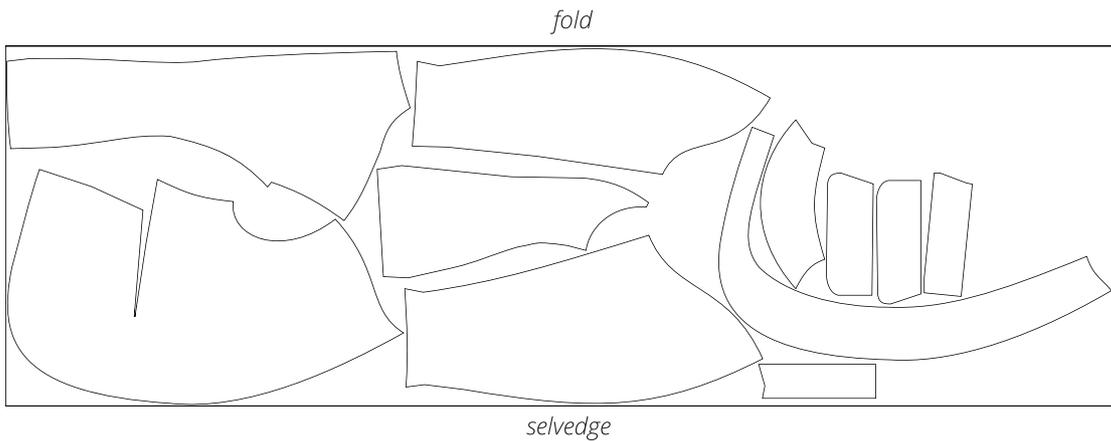



Attention! Cut only one back neck facing piece.

READY? LET'S GET SEWING!

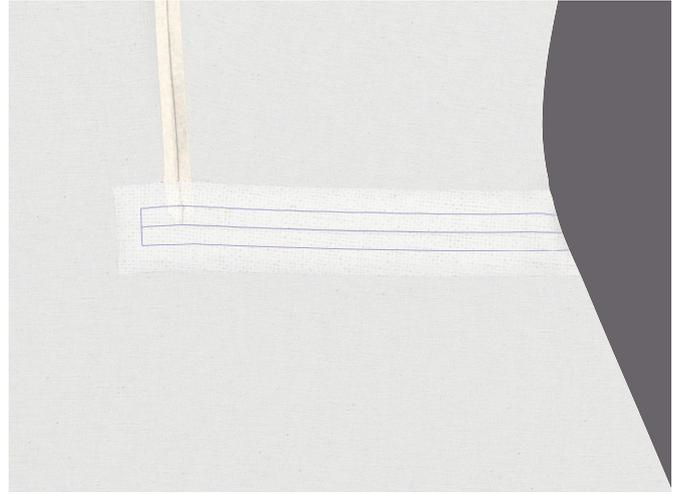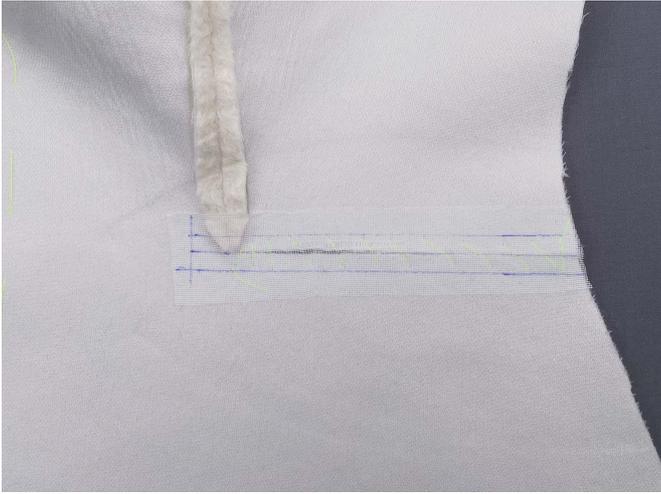


10. Using tailor's chalk or a heat erasable pen, transfer the pocket lines from the pattern to the wrong side of the front piece.

The cut line must run exactly in the middle of the pocket bounding box.

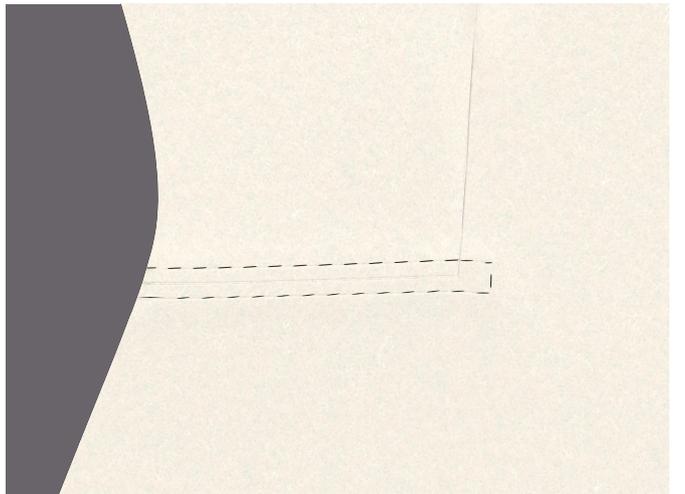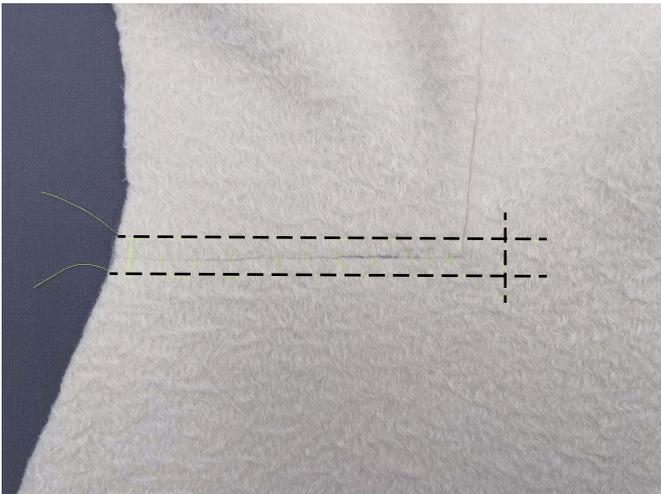

11. Hand-baste along the pocket lines, extending each line by 2 cm (3/4") on both sides.

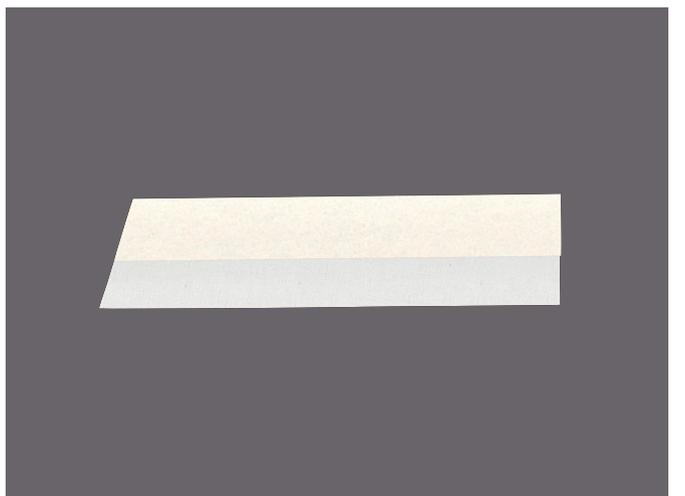

12. Fold the pocket welt piece along the foldline lengthwise, wrong sides together. Press along the fold.