


Viki

S E W S

SKIRT

AISSY

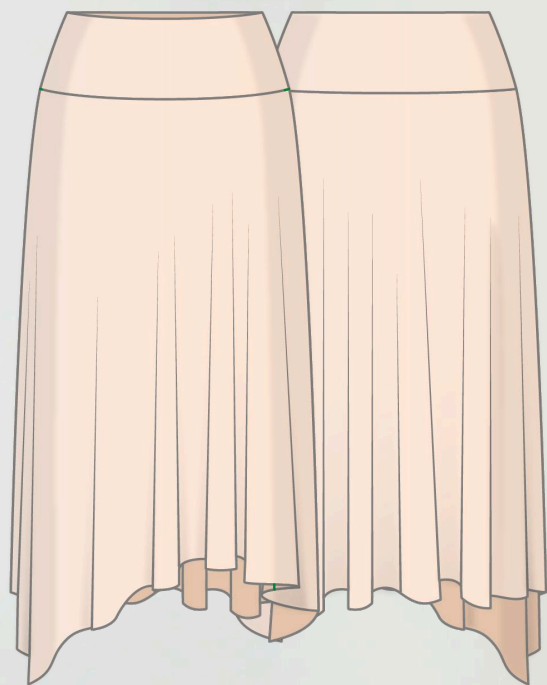

SIZES

34-52

DIFFICULTY



SUITABLE FOR BEGINNERS



FROM THE FOUNDER OF THE VIKISEWS® BRAND




Back in 2016, when I started making my first sewing patterns and instruction manuals, my main goal was to solve the problems I personally faced at the beginning of my sewing journey: the lack of stylish patterns that provide a great fit and contain clear sewing instructions. That's how Vikisews was born—a brand designed to help you create fashionable, on-trend clothing with your own hands.



The sewing instructions we create is the result of our team's careful, meticulous work. May they help you develop your sewing hobby—or even turn it into your life's work! Enjoy every step of the sewing process and create a thoughtful, stylish wardrobe!

If you have any questions, we're always here to help: info@vikisews.com

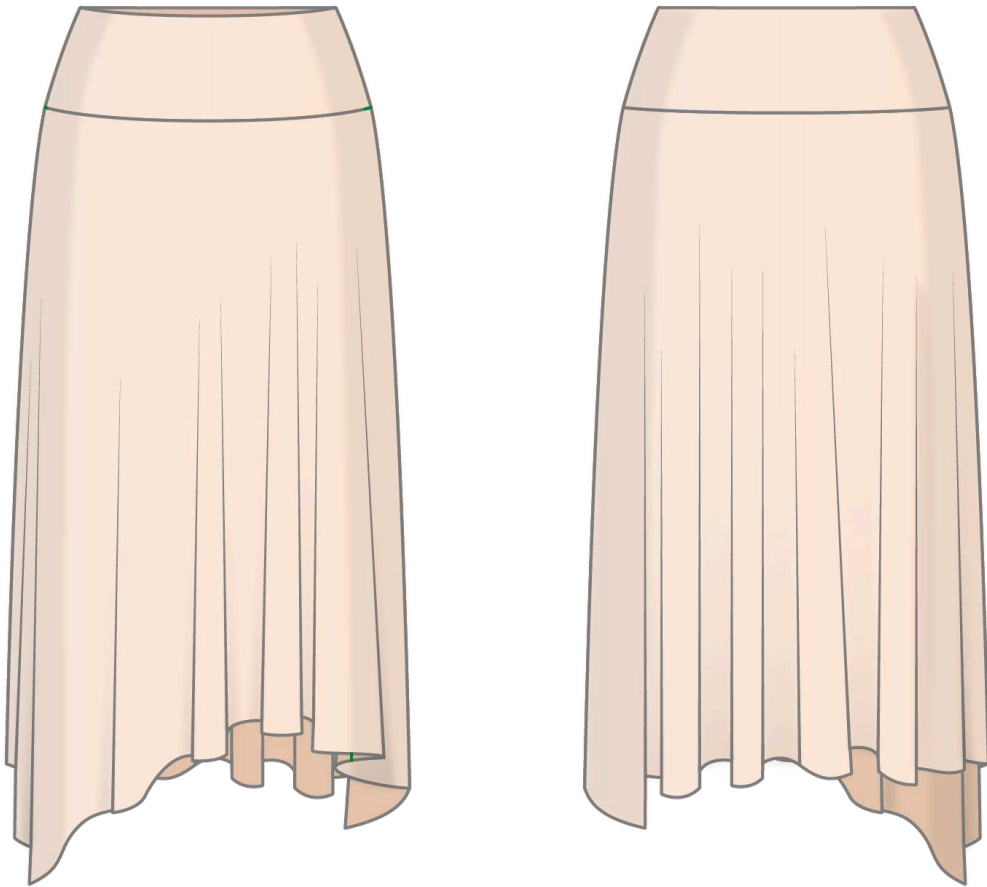

AISY PATTERN DESCRIPTION

Aisy is a semi-fitted A-line skirt with a yoke. The hemline is asymmetrical at the front and back. Aisy is below-knee length.



PLEASE READ BEFORE USE

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Waistline ease (estimated)	Hipline ease
cm	1.3–2.5	-9.2 to -14.9
inches	1/2–1	-3 5/8 to -5 7/8

GARMENT LENGTH

Height, cm	Garment length including yoke width, cm	Height, ft	Garment length including yoke width, in
1 (154–160)	48.2–49.5	1 (5'1"–5'3")	19–19 1/2
2 (162–168)	48.9–50.2	2 (5'4"–5'6")	19 1/4–19 3/4
3 (170–176)	49.3–50.8	3 (5'7"–5'9")	19 3/8–20
4 (178–184)	50.1–51.3	4 (5'10"–6'1")	19 3/4–20 1/4

SUGGESTED FABRICS

To sew this skirt, choose soft, stretchy knit fabrics made of natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: knits, modal knits, viscose knits. The stretch factor should be from 1.5 to 2.

You can determine the stretch factor of your fabric yourself. Mark 10 cm (4") along the crosswise grain of the fabric, lay a ruler next to the marked section, and stretch the fabric. Divide the measurement you get by 10.

The skirt in the photo is made of knit fabric. The fabric is medium-weight, soft, and stretchy. The fiber content is 70% viscose + 30% polyester. The fabric weight is 180 g/m². The stretch factor is 2.

FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size									
	34	36	38	40	42	44	46	48	50	52
1 (154–160)	1.1	1.15	1.2	1.25	1.25	1.3	1.35	1.35	1.4	1.4
2 (162–168)	1.15	1.2	1.25	1.3	1.3	1.35	1.4	1.4	1.45	1.45
3 (170–176)	1.2	1.25	1.3	1.35	1.35	1.4	1.4	1.45	1.45	1.5
4 (178–184)	1.25	1.3	1.3	1.4	1.4	1.45	1.45	1.5	1.5	1.55

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	Size								
	34	36	38	40–42	44	46	48	50	52
1 (5'1"–5'3")	1 1/4	1 1/4	1 1/4	1 3/8	1 3/8	1 1/2	1 1/2	1 1/2	1 1/2
2 (5'4"–5'6")	1 1/4	1 1/4	1 3/8	1 3/8	1 1/2	1 1/2	1 1/2	1 5/8	1 5/8
3 (5'7"–5'9")	1 1/4	1 3/8	1 3/8	1 1/2	1 1/2	1 1/2	1 5/8	1 5/8	1 5/8
4 (5'10"–6'1")	1 3/8	1 3/8	1 3/8	1 1/2	1 5/8	1 5/8	1 5/8	1 5/8	1 3/4

IMPORTANT! When purchasing fabric, please account for shrinkage and buy 5% more than required.

2. Matching thread — 4 spools for the overlocker.

TOOLS AND EQUIPMENT

- sewing machine for construction
- overlocker for finishing raw edges. This may be replaced with a stretch overlock stitch or a zigzag stitch on the sewing machine (overlock or zigzag stitch width 2–3 mm, stitch length 2.5 mm)

IMPORTANT! We recommend using specialty needles when working with knit fabrics (for example, STRETCH, SUPER STRETCH, JERSEY, etc.). These have a ballpoint needle tip that parts the knit loops without piercing the threads.

PATTERN PIECES LIST

From main fabric:

- front – cut 1
- back – cut 1
- front yoke – cut 1 on fold
- back yoke – cut 1 on fold

IMPORTANT! Do not forget to transfer all pattern markings and notches onto the fabric.

IMPORTANT! The pattern pieces that have the "face" inscription on them should be placed with the blank side onto the right side of fabric when cutting.


SEAM ALLOWANCES

All pattern pieces include 1 cm (3/8") seam allowances.

Take this into account when laying out the pattern pieces on the fabric.

CUTTING LAYOUT

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on a single layer, for all sizes in all heights

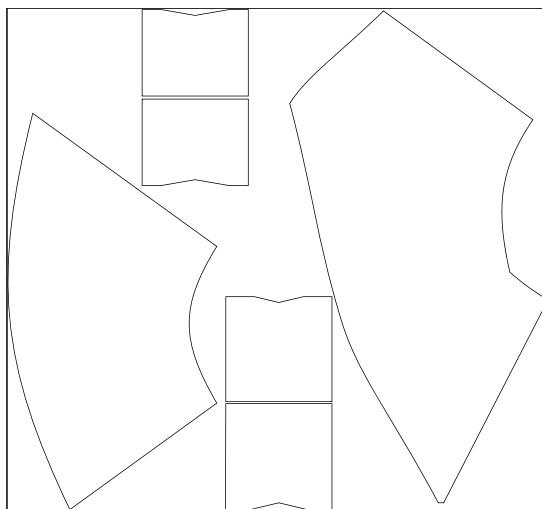

Attention! Cut the front and back pieces from the right side of the fabric.

READY? LET'S GET SEWING!



5. Place the front and back pieces right sides together. Align the side edges, match the notches, and pin. Stitch on the overlocker, with the back piece facing up.



6. Tie the overlocker thread tails into knots and hide them between the fabric layers using a needle.



7. Press the seam flat.



8. Press the side seam allowances towards the front piece.



9. Place the assembled yoke piece onto the right side of the garment. Align the edges, match the notches and side seams, and pin. Stitch on the overlocker, with the yoke piece facing up. Tie the overlocker thread tails into knots and hide them between the fabric layers using a needle.