

# FROM THE FOUNDER OF THE VIKISEWS® BRAND

---



Back in 2016, when I started making my first sewing patterns and instruction manuals, my main goal was to solve the problems I personally faced at the beginning of my sewing journey: the lack of stylish patterns that provide a great fit and contain clear sewing instructions. That's how Vikisews was born—a brand designed to help you create fashionable, on-trend clothing with your own hands.



The sewing instructions we create is the result of our team's careful, meticulous work. May they help you develop your sewing hobby—or even turn it into your life's work! Enjoy every step of the sewing process and create a thoughtful, stylish wardrobe!

If you have any questions, we're always here to help: [info@vikisews.com](mailto:info@vikisews.com)



## GWENDOLINE PATTERN DESCRIPTION

---

Gwendoline is a fully lined loose-fitting coat with a straight silhouette. The stand collar has a free-hanging part that closes with sew-on snaps. The coat features drop shoulders and long, loose-fitting, one-piece shirt sleeves. There are pockets in the side seams. The coat closes with an off-center snap closure. Gwendoline is above-ankle length.



## PLEASE READ BEFORE USE

---

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

# TOTAL EASE ALLOWANCE

---

	Bust ease	Waistline ease	Hipline ease	Upper arm ease
cm	36.4–32.5	57.7–53.3	33.7–29.3	21.8–12.8
inches	14 $\frac{3}{8}$ –12 $\frac{3}{4}$	22 $\frac{3}{4}$ –21	13 $\frac{1}{4}$ –11 $\frac{1}{2}$	8 $\frac{5}{8}$ –5

# GARMENT LENGTH, SLEEVE LENGTH

---

Height, cm	Back length, cm	Sleeve length including shoulder width, cm
1 (154–160)	121.6–125.2	72.1–77.1
2 (162–168)	125.6–129.2	74–79
3 (170–176)	129.6–133.2	75.9–80.8
4 (178–184)	133.6–137.2	77.8–82.7

Height, ft	Back length, in	Sleeve length including shoulder width, in
1 (5'1"–5'3")	47 $\frac{7}{8}$ –49 $\frac{1}{4}$	28 $\frac{3}{8}$ –30 $\frac{3}{8}$
2 (5'4"–5'6")	49 $\frac{1}{2}$ –50 $\frac{7}{8}$	29 $\frac{1}{8}$ –31 $\frac{1}{8}$
3 (5'7"–5'9")	51–52 $\frac{1}{2}$	29 $\frac{7}{8}$ –31 $\frac{3}{4}$
4 (5'10"–6'1")	52 $\frac{5}{8}$ –54	30 $\frac{5}{8}$ –32 $\frac{1}{2}$

# SUGGESTED FABRICS

---

To sew this coat, choose medium weight, soft, non-stretch or low-stretch coating fabrics made of natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: wool, alpaca, cashmere, boucle.

Choose solid colors or melange fabrics, with short to medium pile, or without pile.

For the lining, use lining fabrics made of artificial, blended, or synthetic fibers.

The coat in the photo is made of wool coating fabric. The fabric has a medium pile. The fabric is medium weight, soft, and low-stretch. The fiber content is 100% wool. The fabric weight is 470 g/m<sup>2</sup>.

The lining is made of 46% viscose + 54% polyester. The fabric weight is 100 g/m<sup>2</sup>.

# FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size							
	34	36	38	40	42	44-46	48	50-52
1 (154-160)	2.85	2.85	3.45	3.5	3.5	3.55	3.55	3.6
2 (162-168)	2.95	2.95	3.55	3.6	3.6	3.65	3.65	3.7
3 (170-176)	3.05	3.05	3.7	3.7	3.7	3.75	3.75	3.8
4 (178-184)	3.1	3.15	3.75	3.8	3.85	3.85	3.9	3.9

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	Size							
	34	36	38	40	42	44-46	48	50-52
1 (5'1"-5'3")	3 1/8	3 1/8	3 3/4	3 7/8	3 7/8	3 7/8	3 7/8	3 7/8
2 (5'4"-5'6")	3 1/4	3 1/4	3 7/8	3 7/8	3 7/8	4	4	4
3 (5'7"-5'9")	3 3/8	3 3/8	4	4	4	4 1/8	4 1/8	4 1/8
4 (5'10"-6'1")	3 3/8	3 1/2	4 1/8	4 1/8	4 1/4	4 1/4	4 1/4	4 1/4

2. Main fabric, 150 cm wide, with a directional print/nap, in meters:

Height, cm	Size								
	34	36	38	40	42	44	46	48-50	52
1 (154-160)	2.8	2.85	2.85	2.9	2.9	2.95	3.5	3.55	3.6
2 (162-168)	2.85	2.9	2.95	2.95	3	3	3.6	3.65	3.7
3 (170-176)	2.95	3	3.05	3.05	3.1	3.1	3.75	3.75	3.8
4 (178-184)	3	3.1	3.1	3.15	3.15	3.2	3.85	3.85	3.9

Main fabric, 59" wide, with a directional print/nap, in yards:

Height, ft	Size								
	34	36	38	40	42	44	46	48-50	52
1 (5'1"-5'3")	3	3 1/8	3 1/8	3 1/8	3 1/8	3 1/4	3 7/8	3 7/8	3 7/8
2 (5'4"-5'6")	3 1/8	3 1/8	3 1/4	3 1/4	3 1/4	3 1/4	3 7/8	4	4
3 (5'7"-5'9")	3 1/4	3 1/4	3 3/8	3 3/8	3 3/8	3 3/8	4 1/8	4 1/8	4 1/8
4 (5'10"-6'1")	3 1/4	3 3/8	3 3/8	3 1/2	3 1/2	3 1/2	4 1/4	4 1/4	4 1/4

3. Lining fabric, 140 cm wide, with a directional print, in meters:

Height, cm	Size					
	34	36	38	40-42	44-48	50-52
1 (154-160)	1.95	1.95	1.95	2	2	2.4
2 (162-168)	2	2	2.05	2.05	2.1	2.5
3 (170-176)	2.05	2.1	2.1	2.15	2.15	2.55
4 (178-184)	2.15	2.15	2.2	2.2	2.2	2.65

Lining fabric, 55" wide, with a directional print, in yards:

Height, ft	Size					
	34	36	38	40-42	44-48	50-52
1 (5'1"-5'3")	2 $\frac{1}{8}$	2 $\frac{5}{8}$				
2 (5'4"-5'6")	2 $\frac{1}{8}$	2 $\frac{1}{8}$	2 $\frac{1}{4}$	2 $\frac{1}{4}$	2 $\frac{1}{4}$	2 $\frac{3}{4}$
3 (5'7"-5'9")	2 $\frac{1}{4}$	2 $\frac{1}{4}$	2 $\frac{1}{4}$	2 $\frac{3}{8}$	2 $\frac{3}{8}$	2 $\frac{3}{4}$
4 (5'10"-6'1")	2 $\frac{3}{8}$	2 $\frac{7}{8}$				

4. Lightweight interfacing, knit or woven, 140 cm wide, in meters:

Height, cm	Size					
	34	36	38	40-48	50	52
1 (154-160)	1.3	1.35	1.35	1.35	1.4	1.4
2 (162-168)	1.35	1.35	1.4	1.4	1.4	1.45
3 (170-176)	1.4	1.4	1.4	1.45	1.45	1.45
4 (178-184)	1.45	1.45	1.45	1.45	1.5	1.5

Lightweight interfacing, knit or woven, 55" wide, in yards:

Height, ft	Size					
	34	36	38	40-48	50	52
1 (5'1"-5'3")	1 $\frac{3}{8}$	1 $\frac{1}{2}$				
2 (5'4"-5'6")	1 $\frac{1}{2}$	1 $\frac{5}{8}$				
3 (5'7"-5'9")	1 $\frac{1}{2}$	1 $\frac{1}{2}$	1 $\frac{1}{2}$	1 $\frac{5}{8}$	1 $\frac{5}{8}$	1 $\frac{5}{8}$
4 (5'10"-6'1")	1 $\frac{5}{8}$					

**IMPORTANT!** *When purchasing fabric, please account for shrinkage and buy 5% more than required.*

5. Stitched bias-cut fusible stay tape with stitch reinforcement, 1.5 cm (5/8") wide — 3.6–4 m (3 7/8–4 3/8 yd)
6. One decorative button
7. Eight sew-on snaps, 2.2 cm (7/8") in diameter
8. Matching thread — 1 spool for the sewing machine
9. Matching thread for the lining fabric— 1 spool for the sewing machine

## TOOLS AND EQUIPMENT

---

- sewing machine for construction
- stitch-in-the-ditch foot for the sewing machine (optional)

## PATTERN PIECES LIST

---

### 1. From main fabric:

- front — cut 2
- back — cut 1 on fold
- sleeve —cut 2
- upper collar — cut 1 on fold
- undercollar — cut 1 on fold
- back neck facing —cut 1
- front facing —cut 2
- pocket facing — cut 2

### 2. From lining fabric:

- front lining — cut 2
- back lining — cut 1 on fold
- sleeve lining — cut 2
- pocket top lining — cut 2
- pocket bottom lining — cut 2

**IMPORTANT!** *Don't forget to transfer all pattern markings and notches onto the fabric.*

### 3. From interfacing:

- front facing — cut 2
- back neck facing — cut 1
- upper collar — cut 1 on fold
- undercollar — cut 1 on fold
- pocket facing— cut 2

Also, cut from interfacing:

- 2 strips, width and length according to the pattern, to interface the hem on the front pieces
- 1 strip, width and length according to the pattern, to interface the hem on the on the back pieces
- 2 strips, width and length according to the pattern, to interface the hem on the sleeve pieces

The interfacing strips should be cut on the straight grain (parallel to the selvedge).

## SEAM ALLOWANCES

---

All pattern pieces include seam allowances as follows:


- garment hem allowance — 4 cm (1 5/8")
- sleeve hem allowance — 4 cm (1 5/8")
- pocket lining curved edges — 1.5 cm (5/8")
- all other edges — 1 cm (3/8")

Take this into account when laying out the pattern pieces on the fabric.

## CUTTING LAYOUT


---

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold,  
for sizes 34–36 in all heights; Main fabric, 150 cm (59") wide, with a directional print/nap,  
cut on fold, for sizes 34–44 in all heights

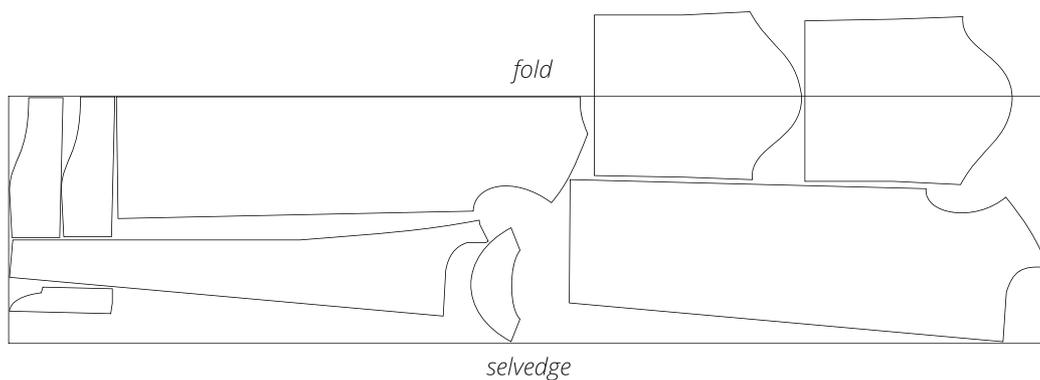


**Important!** Cut the sleeve pieces on a single layer out of leftover the fabric.  
Cut only one back facing piece.

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold,  
for sizes 38–52 in all heights; Main fabric, 150 cm (59") wide, with a directional print/nap,  
cut on fold, for sizes 46–52 in all heights

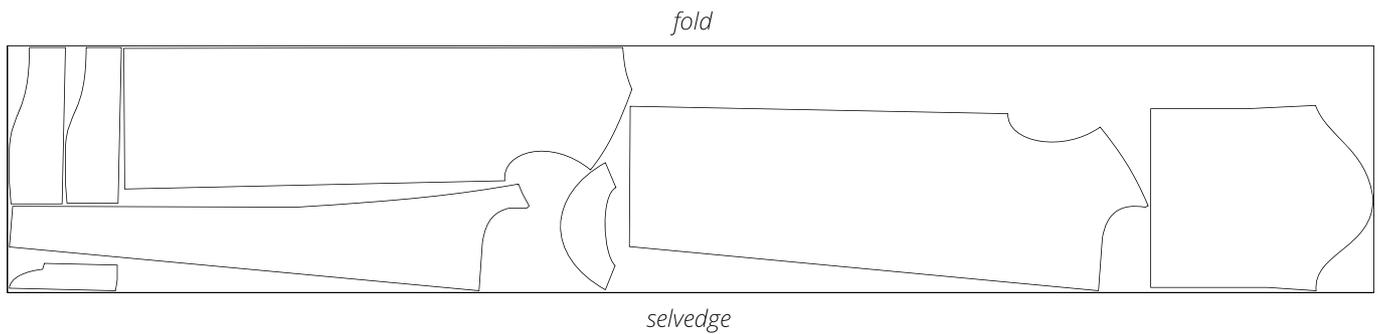


**Important!** Cut only one back neck facing piece.

Lining fabric, 140 cm (55") wide, with a directional print,  
cut on fold, for sizes 34–48 in all heights

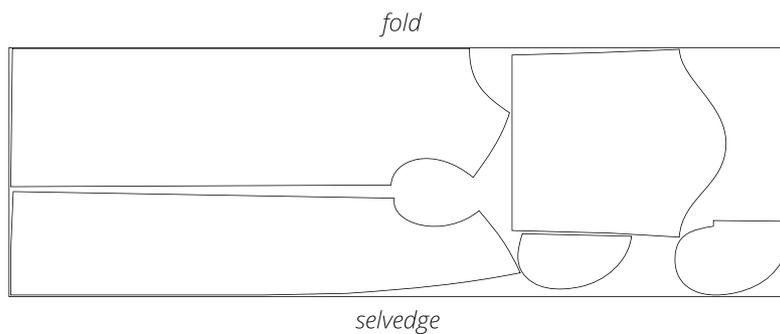


Lining fabric, 140 cm (55") wide, with a directional print,  
cut on fold, for sizes 50–52 in all heights

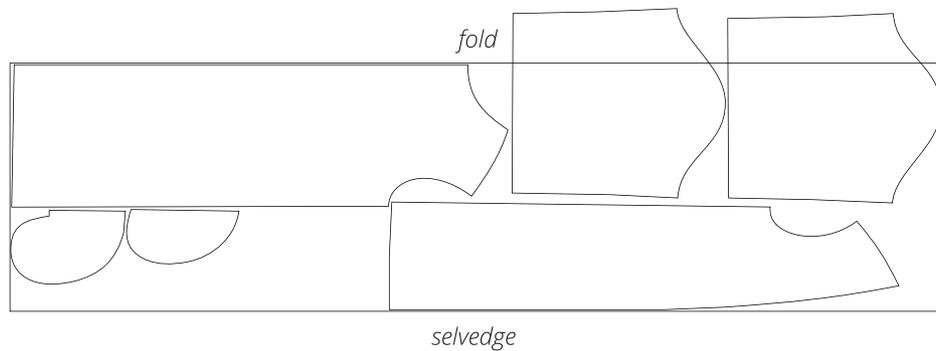

**Important!** Cut the sleeve pieces on a single layer out of leftover the fabric.


Interfacing, 140 cm (55") wide,  
cut on fold, for all sizes in all heights

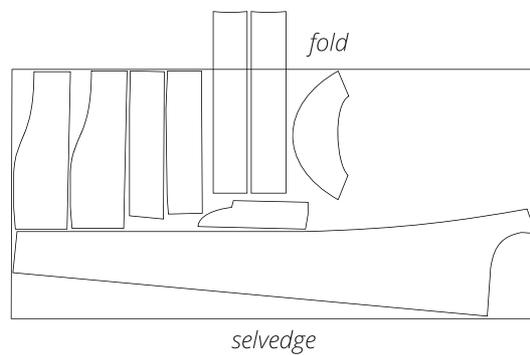

**Important!** Cut the interfacing strips for the sleeve pieces on a single layer out of leftover the fabric. Cut only one back facing piece.

**READY? LET'S GET SEWING!**



---

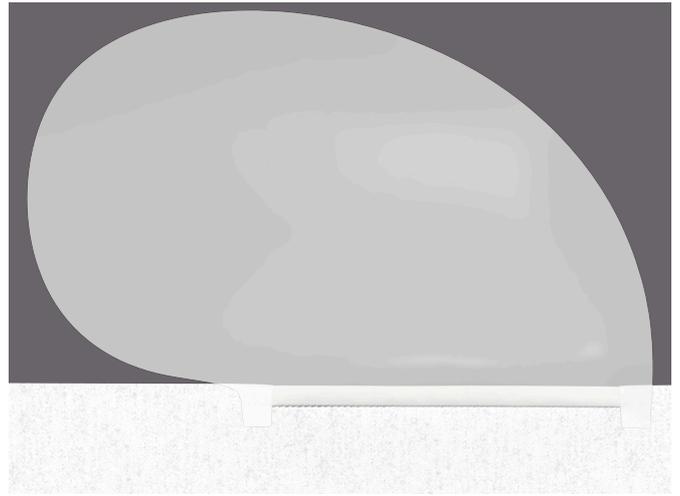

4. Press the seam allowances towards the pocket lining.



5. Working from the right side of the pocket lining piece, understitch the seam allowances at 1-2 mm from the seam. Backstitch at the beginning and end of the seam.

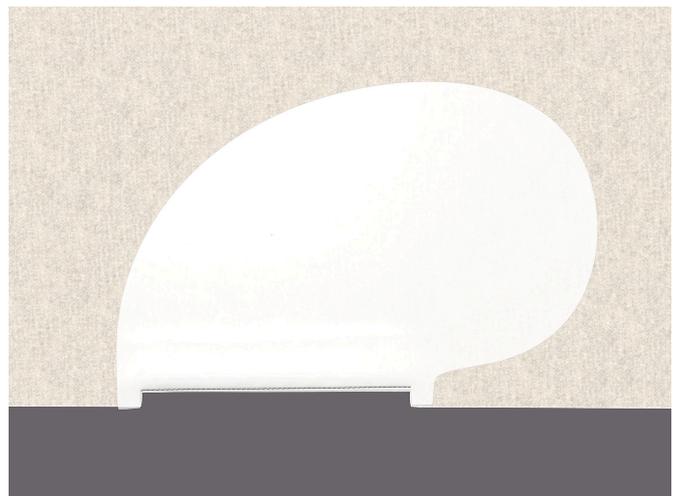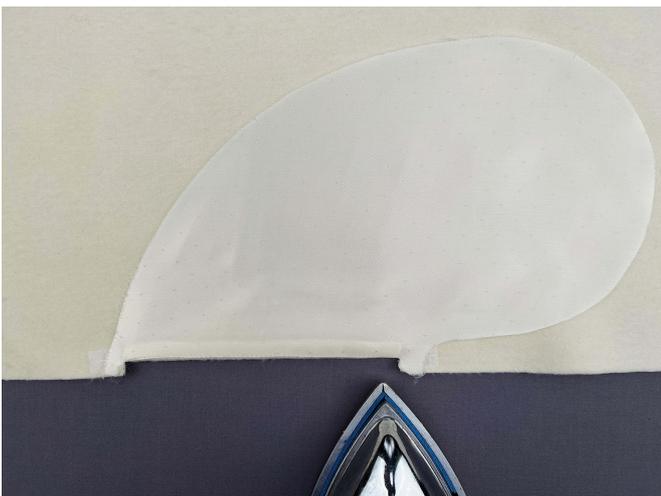

6. Turn the pocket lining to the wrong side of the front piece. Press the seam right on the edge.