

FERTILIZER SPREADER PULL TYPE

FSP100 / 150



FERTILIZER SPREADER

FS150 / 300 / 500 / FP300 / 500

For green areas and garden use.



All our fertilizer spreaders are made of high-quality materials. They are degreased, then painted with antitrust and finally coated with anticorrosive paint dried at 120° C. Also suitable for spreading rice, wheat, and many other cereals, as well as for salt and sand on icy roads.

Spreading flow adjustment lever.


Adjustable spinner fins on all our fertilizer spreaders, duly designed to give maximum spreading accuracy and uniformity.

Spreaders for green areas and garden use. The FSP series spreaders are designed to be used on small tractors, garden vehicles and trucks, without P.T.O. shaft. These spreaders can be used for spreading fertilizers, sand or salt depending on the needs of users.

The movement of the wheels through the gearbox, fitted on the main axle, makes the spreading disc turn. The forward speed determines the spreading width. By acting on the lever it is possible to increase or decrease the quantity of product to be spread. On request, this spreader can be supplied with a deflector for spreading salt or sand that allows spreading the product only below the hopper.

OPTIONAL

- Deflector kit for spreading sand or salt.

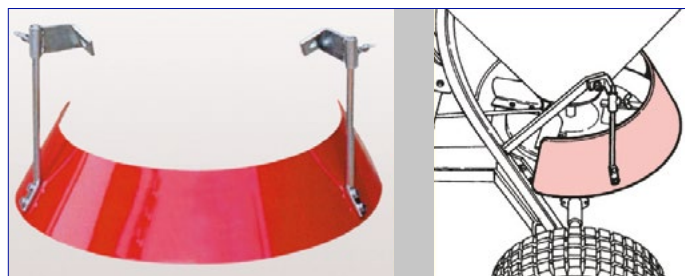

Specifications	FSP100	FSP150
Hopper capacity	26,5 Usa Gal. 100 Litre	38 Usa Gal. 144 Litre
Maximum loading capacity	264 Lbs 120 Kg	352 Lbs 160 Kg
Width of spreading pattern dep	2,2 - 6,5 Yard 2-6 m	2,2 - 6,5 Yard 2-6 m
Overallheight	40 inch 1 m	42 inch 1,35 m
Hopper width	32 inch 0,8 m	42 inch 1,35 m
Power Required	4 Hp - 3 Kw	4 Hp - 3 Kw

Designs, materials and/or specifications are subject to change without notice and without liability thereof.

Your partner in farming



Organization with certified Management System ISO 9001

Viale Grecia, 22 - 06018 Trestina (PG) - ITALY | **Phone:** +39 075.854.00.21 | **Email:** sitrex@sitrex.it | **www.sitrex.com**